

Style: AB 6300-06  
 Lot: 8900-06  
 Piece: 5  
 Customer: Textile Ltd

Date/time: 06/30/2006, 16:11 - 06/30/2006, 16:20  
 Operator: J. Smith


**Dynamic Air Permeability**

Start volume: 404 cm<sup>3</sup>  
 Start pressure: 400 kPa  
 Pressure limits: 30/70 kPa  
 Test area: 50 cm<sup>2</sup>


Date/time: 06/30/2006, 16:11 - 06/30/2006, 16:20  
 Instrument: Textest FX 3350, s/n: 102

	ADAP	Exponent	
1:	2'190 mm/s	0.798	
2:	2'210 mm/s	0.769	
3:	2'550 mm/s +	0.765	
4:	3'050 mm/s +	0.806 +	««« deleted damaged
4:	1'910 mm/s	0.790	

Commentary:

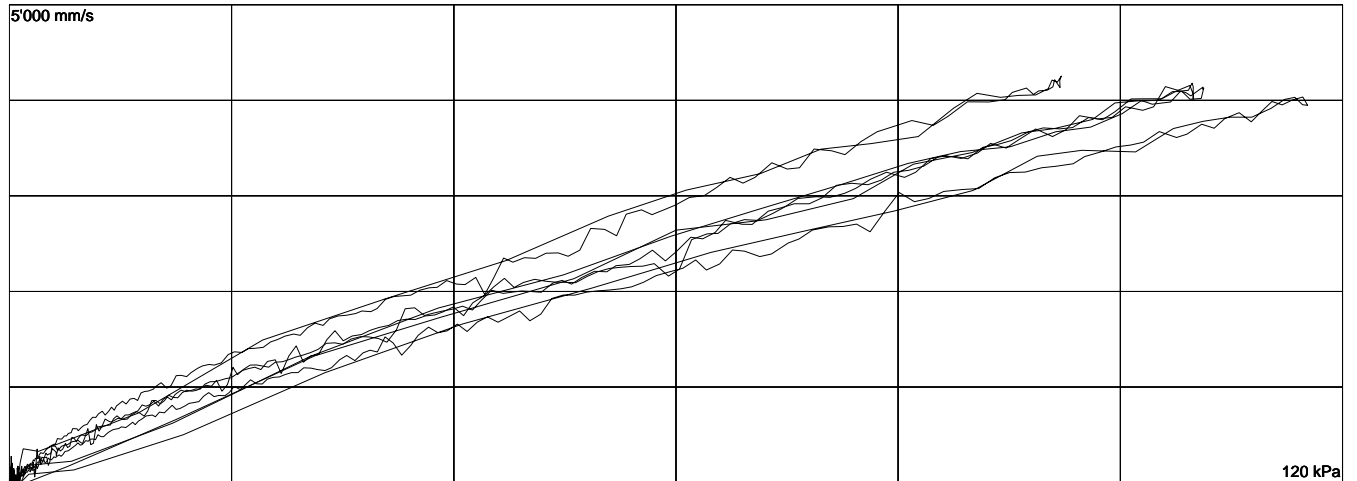

Avg:	2'220 mm/s	Nominal:	2'100 mm/s
Min:	1'910 mm/s	Min:	1'700 mm/s
Max:	2'550 mm/s +	Max:	2'500 mm/s
CV:	11.8 %	Tests:	4
Cl:	18.8 %	Cl:	

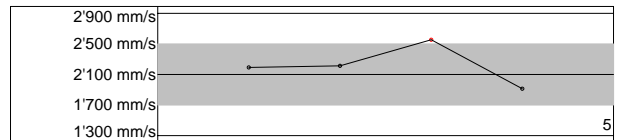

Avg:	0.780	Nominal:	0.775
Min:	0.765	Min:	0.750
Max:	0.798	Max:	0.800
CV:	2.1 %	Tests:	4
Cl:	3.3 %	Cl:	

